


Embedded Soft Edge Presentation using one Di-VentiX II

4 Live PIP Layers - 1 Background Frame - 2 Logos

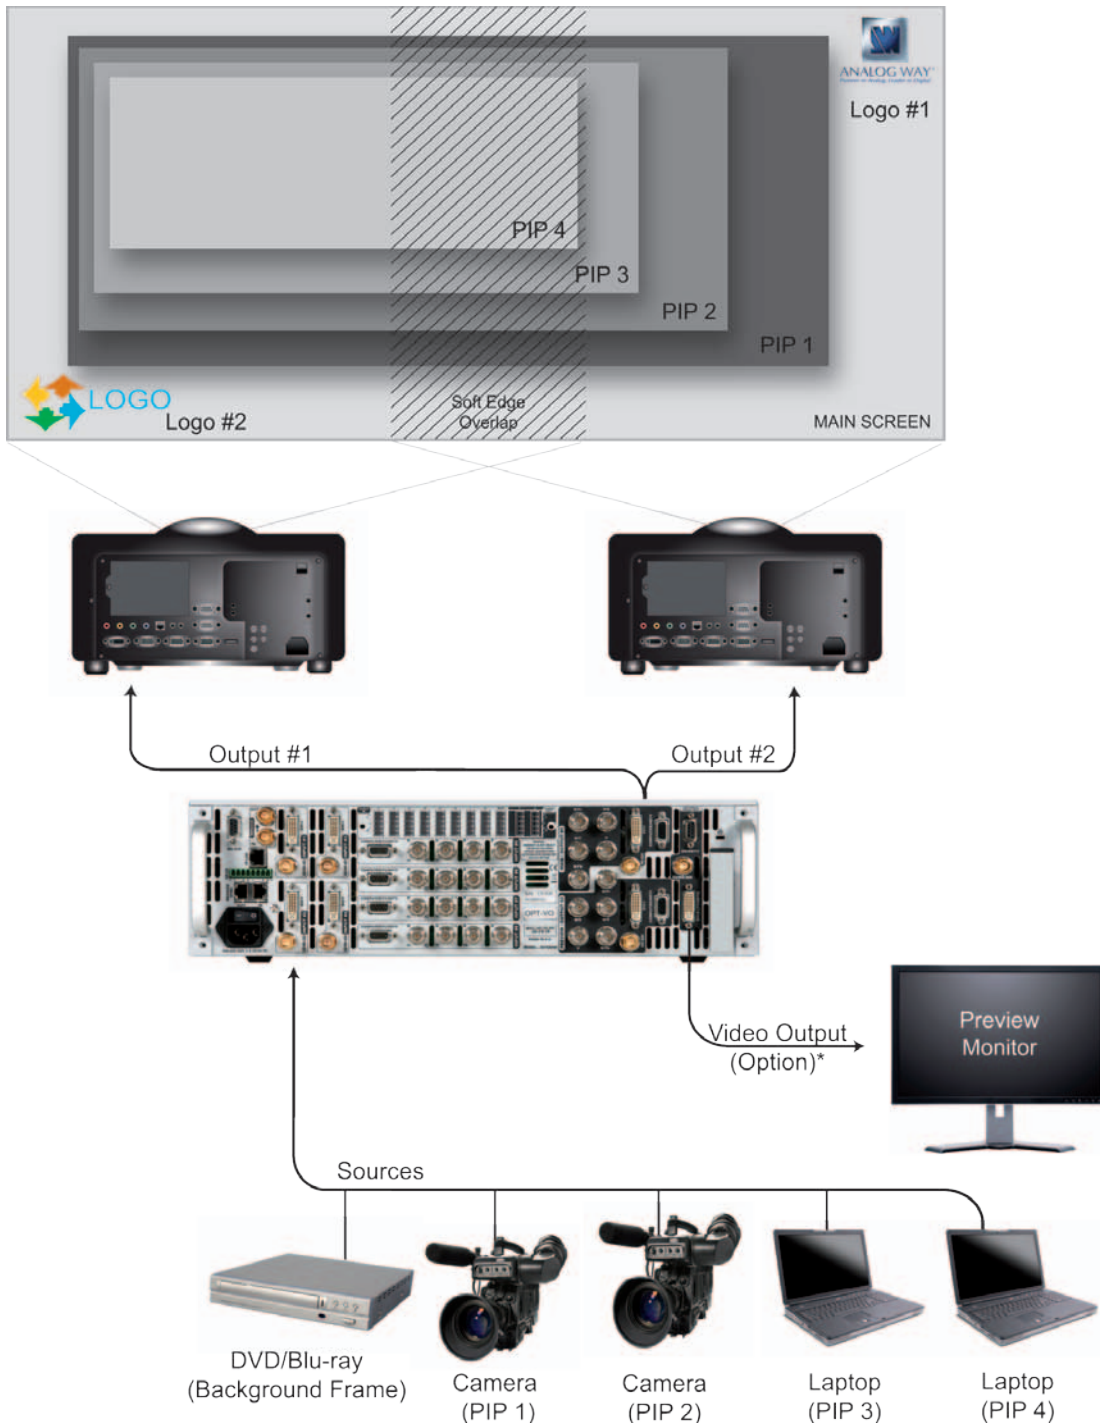

The **Di-VentiX II** in Embedded Soft Edge mode can seamlessly switch through any of the four available frames stored in its memory.

Di-VentiX II can display up to four live sources in Embedded Soft Edge Blending Mode, regardless of layer sizes and positions. When stored backgrounds or logos are used as well, **Di-VentiX II** will handle up to seven simultaneous layers (1 Frame, 4 Lives, 2 Logos).

*Video Output card (optional) provides SD or HD TV formats in various signals and connectors from Composite Video to HD SDI. This Output can be used to record the show by outputting the same contents as the main output or to display the Preview image on video monitors. In addition, it can be used as a real preview output in case of Sync Matrix or Embedded Edge Blending Mode.