# Front and back rack mount for the LiveCore-based systems

Two rack kits are supplied with the device:


- Front ears (Ref: 180469)
- Rear rack mount rail (Ref: 180489)

**SCREWS SUPPLIED** 16 x **M4x10** 

(Compatible with the following devices: NeXtage (all references), SmartMatriX Ultra, Ascender (all references), LiveCore™ Output Expander (all references)


### CAUTION!

Mounting using only the front rack ears is sufficient for fixed installations. Additional support, such as the rear rack support or slide rails, is required for mobile applications, and recommended for all.

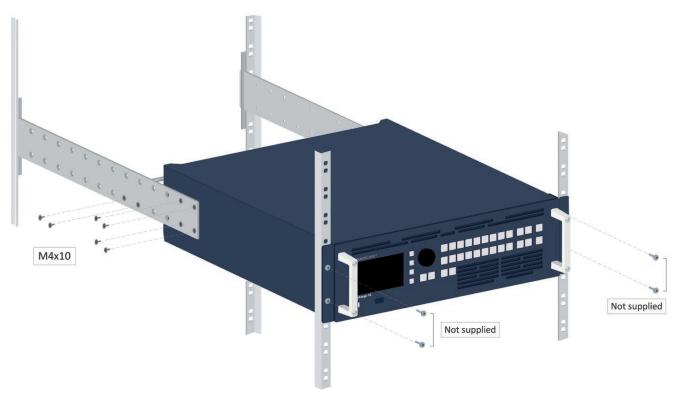

# To install the front ears:

Simply screw ears on each side of the device using 2 screws M4x10 (included), then place your unit into the rack and screw the ears on the rack (screws not provided).

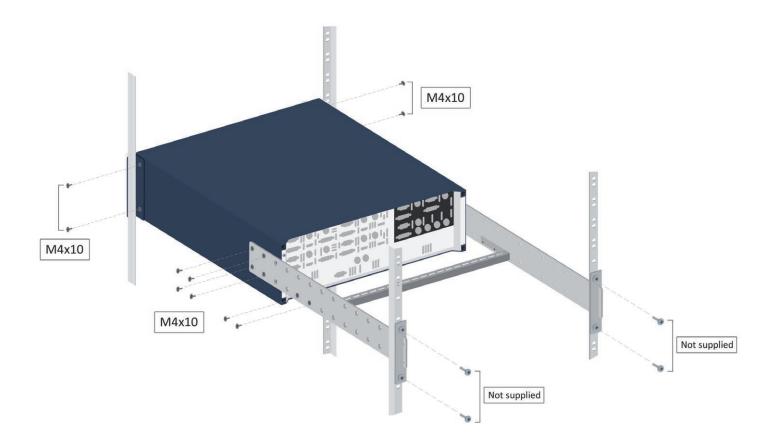

# To install the rear rack rail:

Once your unit is installed into your rack, please use 4 M4x10 screws to put the rear rail on each side of the device. You will find on each side 4 holes where the screws can be put into.

To screw the rail to the rack, you need 2 screws on each side, those screws are not included into the package. A lacing bar is available in the rail mount pack. Install this bar anywhere between the two rails using 2 M4x10 screws. Choose the right distance according to your cable position. Then you can use tie cables to maintain your video cables on this lacing bar.

### CAUTION!

Make sure to provide an adequate ventilation for the device. When you install it into the rack, make sure no ventilation holes are blocked. The air intakes by the front panel and exhausts by the back of the unit.

Make sure that the rails will pass through the back ears by the minimum of 15mm/ 0,59 inch